


Statement  
**LUXURY**



— 600X1200MM —



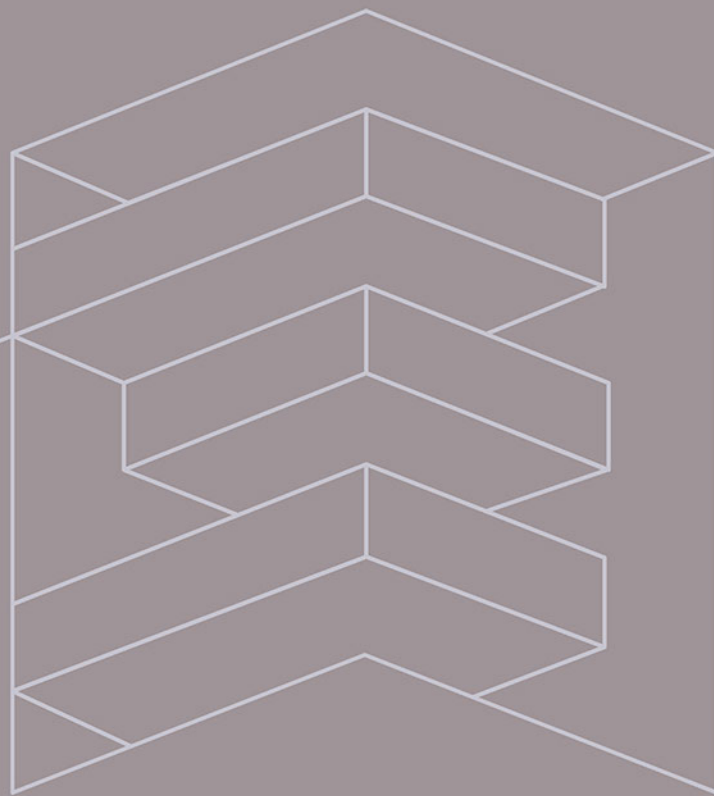

## About Us

EDDICA CERAMICS offers several types of Ceramic & Vitrified tiles to compliment any environmental imagination. We supply the most durable & delightful material in all over the world.

We are leader in manufacturing & exporting of ceramic & vitrified tiles from India for wall and floor coverings of residential, retail and industrial projects. The promoters of EDDICA CERAMICS have a vast 15 Years experience in this industries, Which makes EDDICA CERAMICS as one of the most reputed & reliable brand worldwide.

With a range of more collections, EDDICA CERAMICS has been adding to the prestige of Italian-made coverings world-wide from 2016, and is constantly demonstrating its commitment to the creation of tiles with high technical and stylistic value, characterized by leading-edge design of an excellence reflected by prizes and awards.

# Digital Glazed Vitrified Tiles

Eddica Ceramics presents a new collection of Digital Glazed Vitrified Tiles made with glazed surfaces with the use of digital technology for printing exquisite designs printed on the glaze coating, resulting in a wide range of beautiful tile designs according to the trends. There are a multitude of design possibilities, encompassing design variations, high-resolution printing, and sharper finishes.

## Advantages Features



LONG DURABILITY



EASY TO CLEAN



IMPACT RESISTANCE



FIRE RESISTANCE



CHEMICAL RESISTANCE



FROST RESISTANCE



LOW WATER ABSORPTION

## Tiles Use In Application



RESIDENTIAL



COMMERCIAL



HOTEL & RESTAURANT



HOSPITAL



AIRPORT



SCHOOL & COLLEGE



GYMNASIUM



MALL & SUPER MARKET



SPA



RELIGIOUS PLACE



HALL CORRIDOR



INDUSTRY





## — GVT & PGVT —

The DOUBLE CHARGE COLLECTION stands out with its superior thickness, surpassing the standard tile dimensions. These tiles are created by fusing two layers, incorporating two colours of pigment, and employing a press that prints a dual-coloured pattern onto each tile. This unique production method ensures exceptional strength and durability.





# AMAZONITE GRIS

Size : 600x1200mm

Finish : Glossy

Random : 03

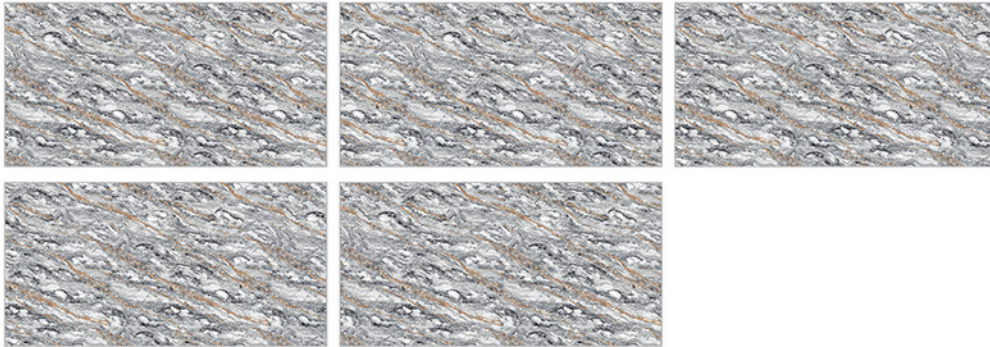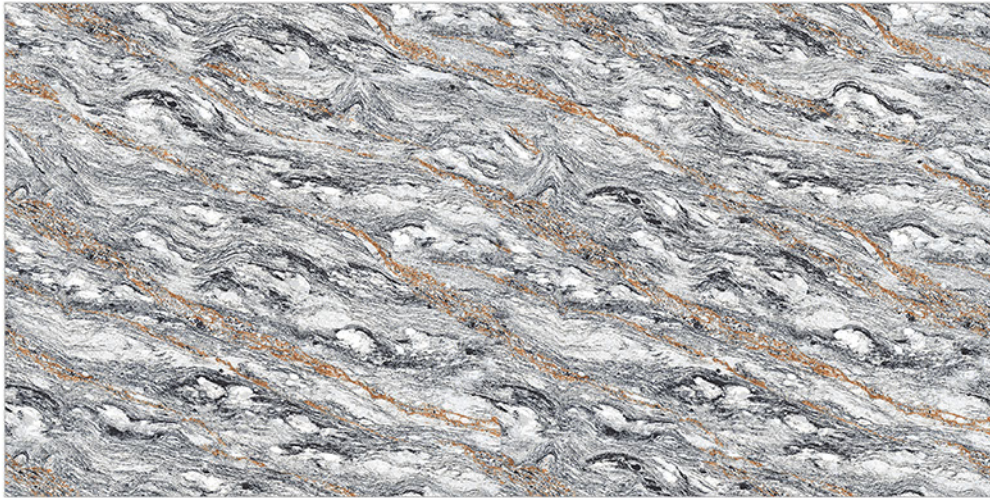


# FLOW BIANCO


Size : 600x1200mm

Finish : Glossy

Random : 03

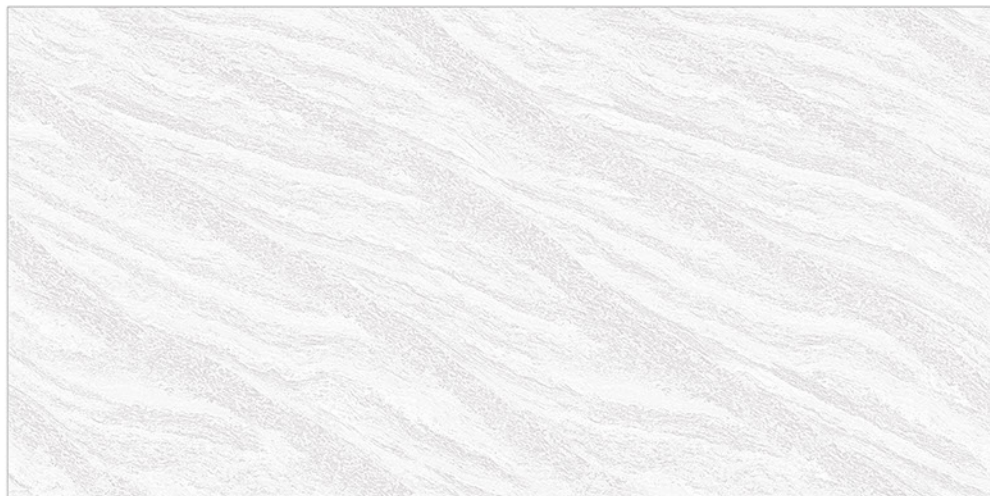

# FLOW GRAFITO

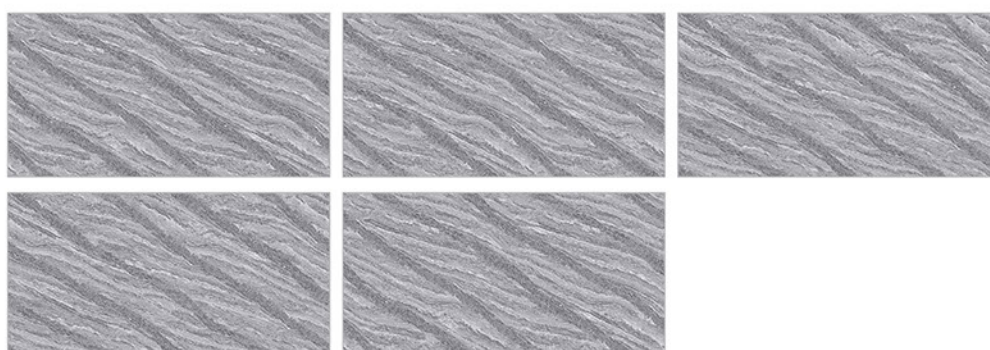




# FLOW CREMA

Size : 600x1200mm

Finish : Glossy

Random : 03

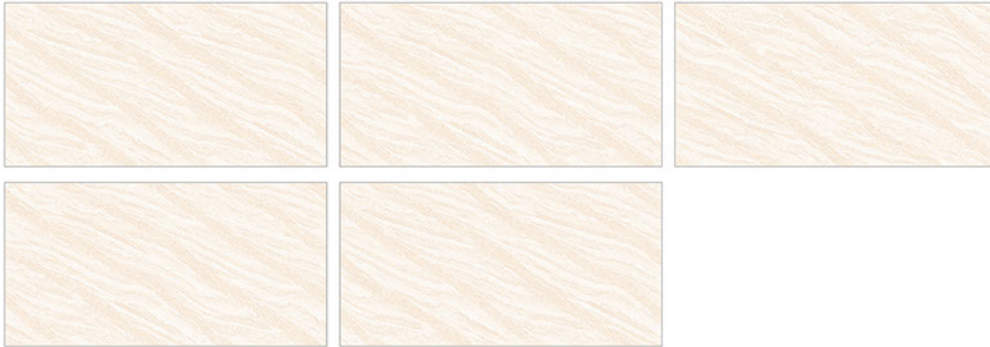

-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT

# FLOW BROWN



-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT







# GRAPHITE BLUE

Size : 600x1200mm

Finish : Glossy

Random : 03

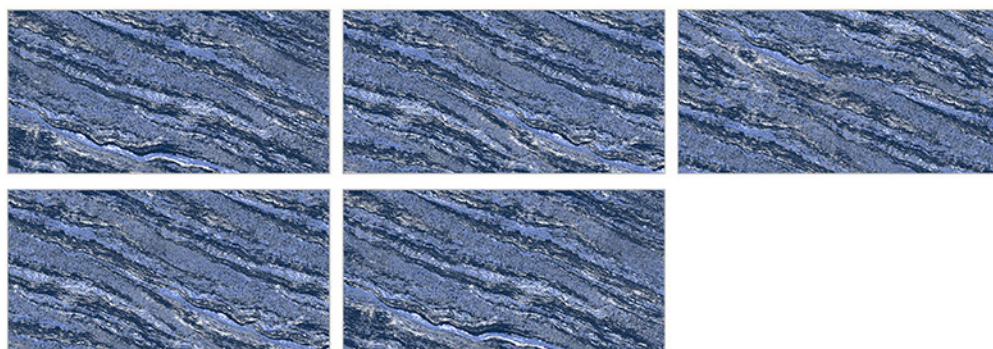
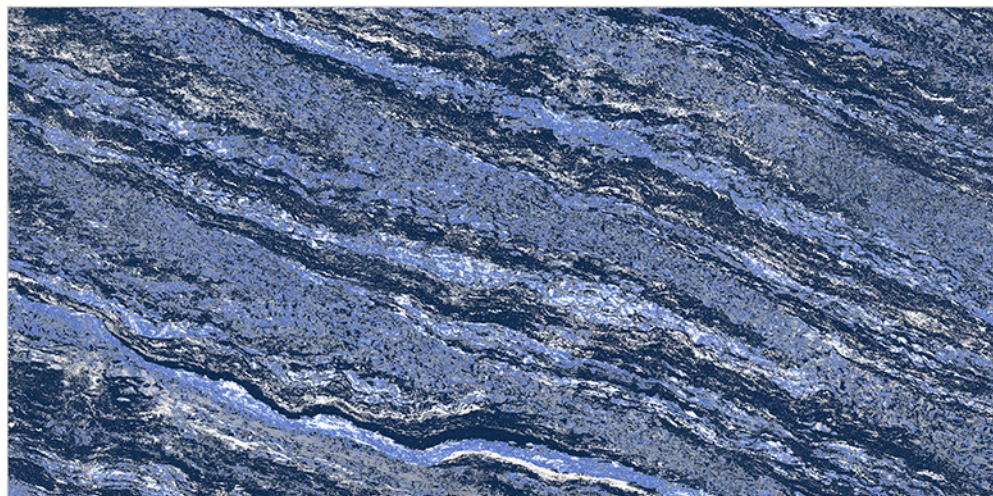


# GRAPHITE BROWN

Size : 600x1200mm

Finish : Glossy

Random : 03

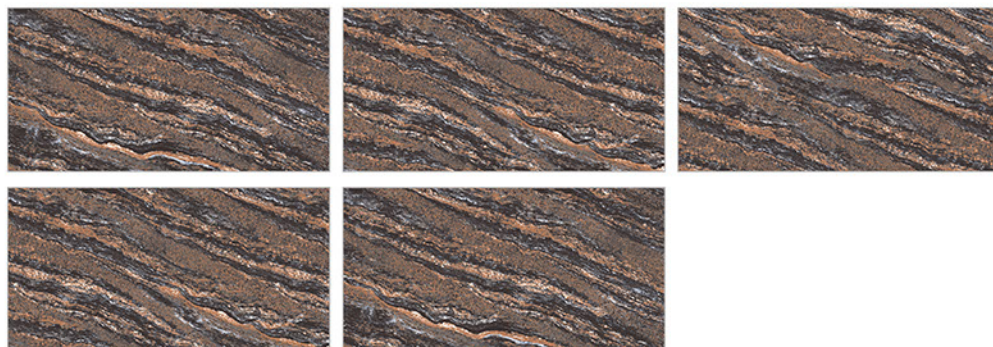
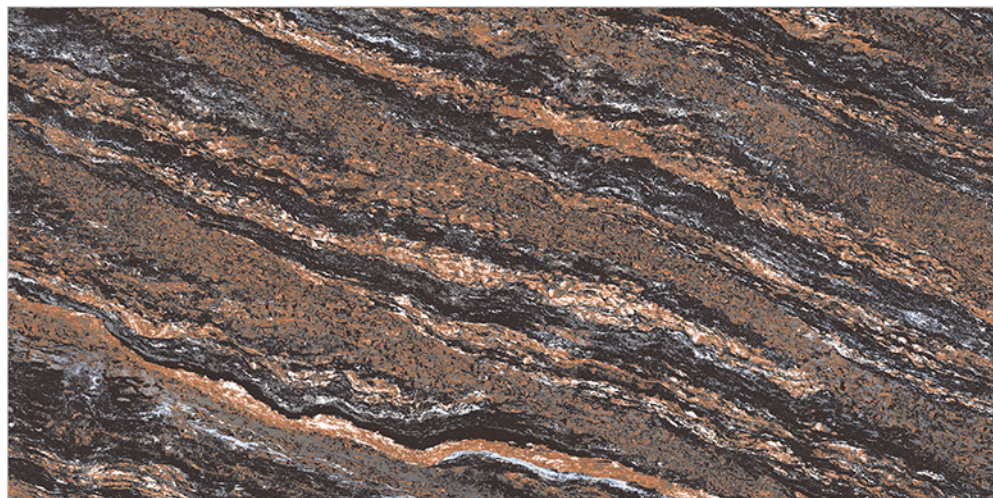


# MATRIX CREMA






Size : 600x1200mm

Finish : Glossy

Random : 03

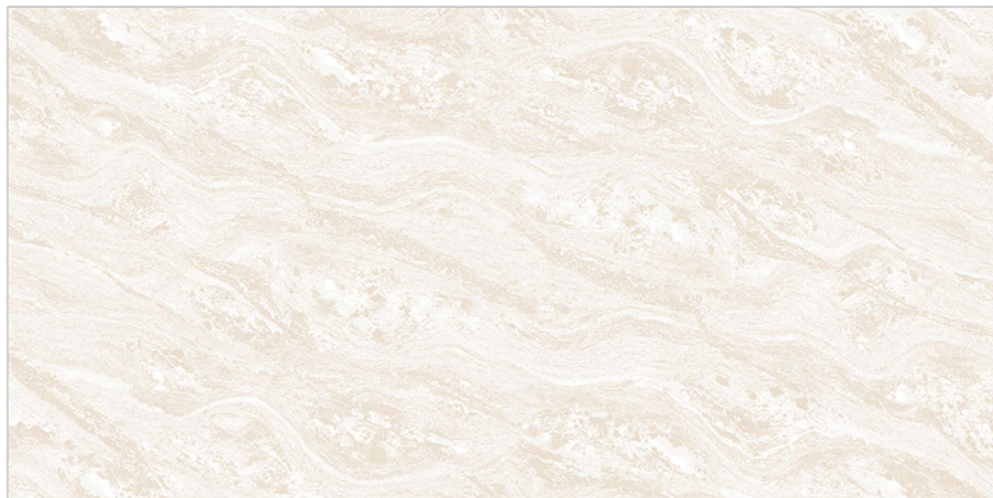

# MATRIX BROWN

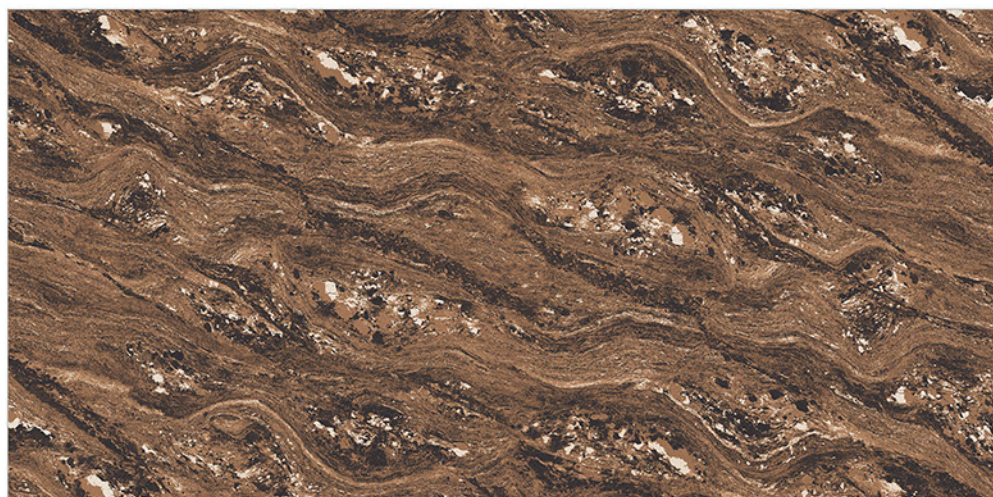



# MATRIX GRIS

Size : 600x1200mm

Finish : Glossy

Random : 03



LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT



RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT



# MATRIX AZUL



LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT




RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT

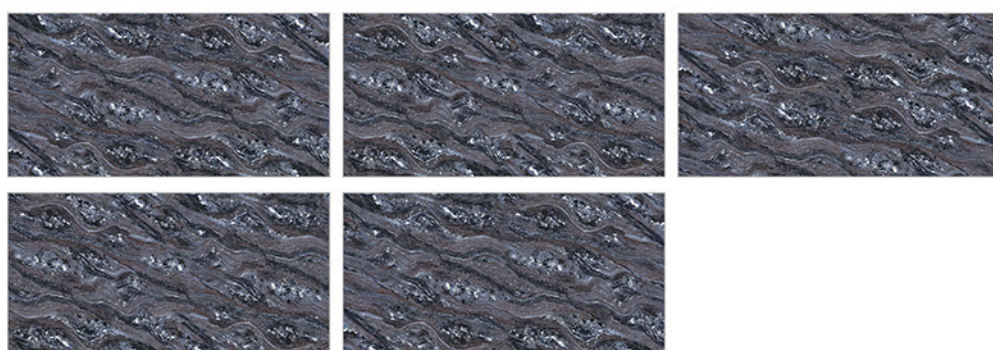





# ORCHID BIANCO



Size : 600x1200mm

Finish : Glossy

Random : 03

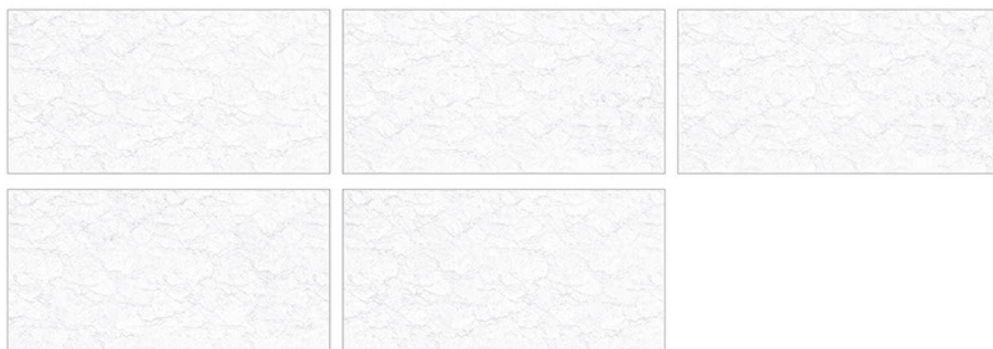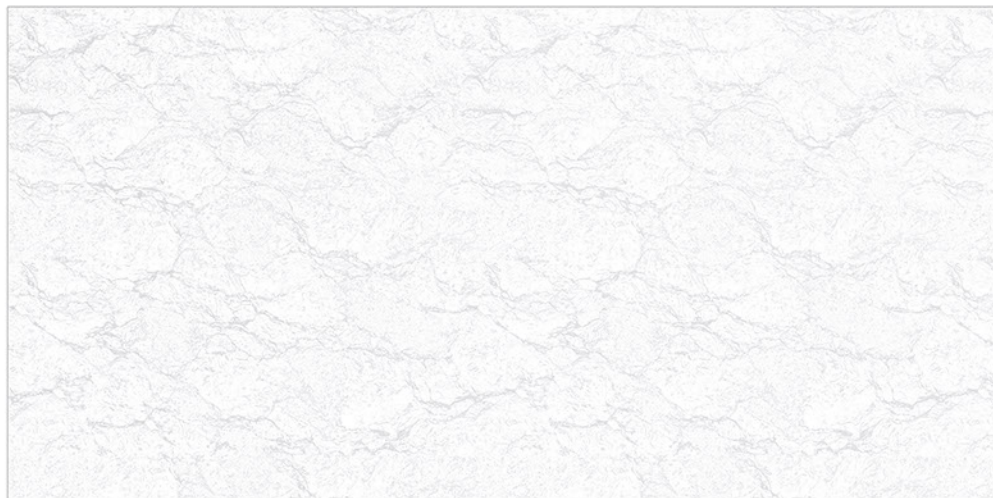

# ORCHID GREY

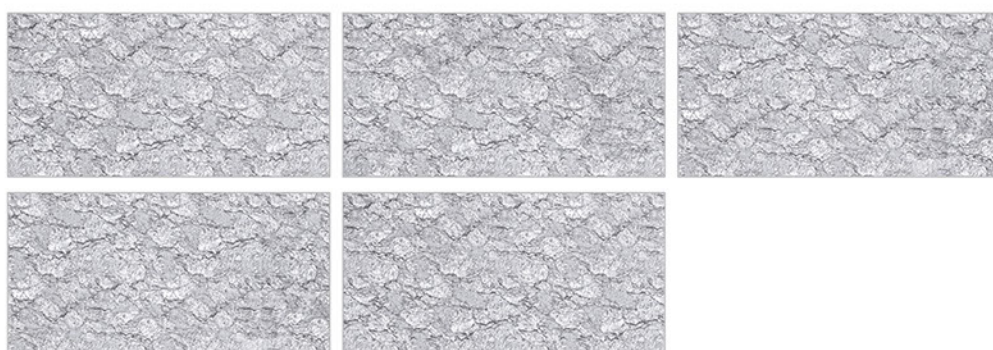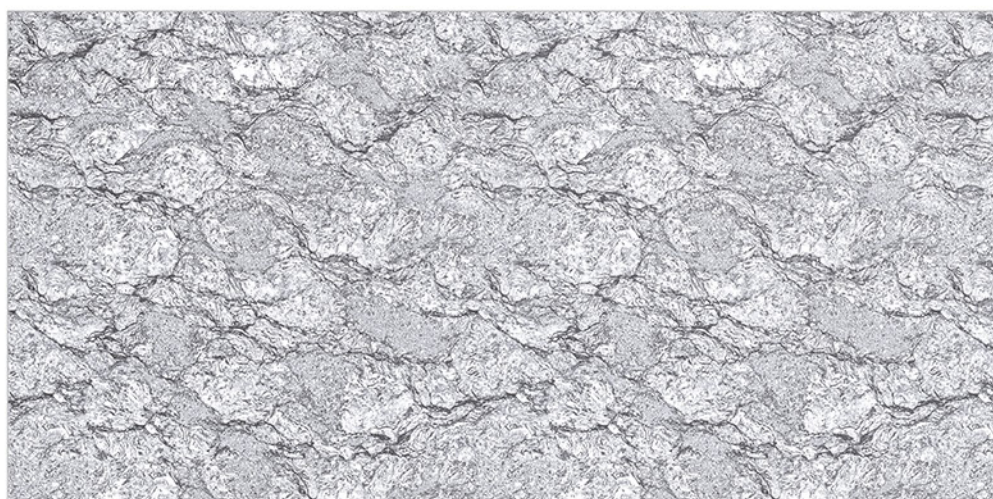






# ORCHID CREMA

Size : 600x1200mm

Finish : Glossy

Random : 03

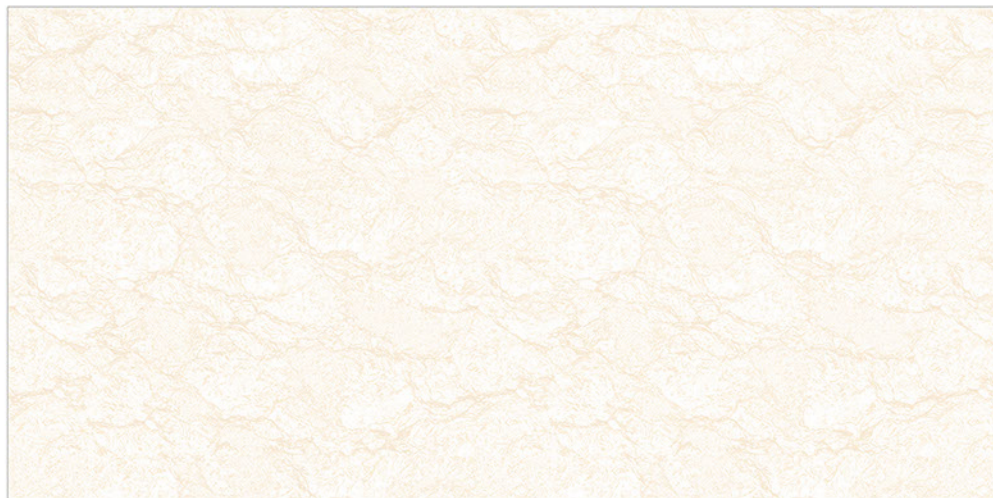

LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT




RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT

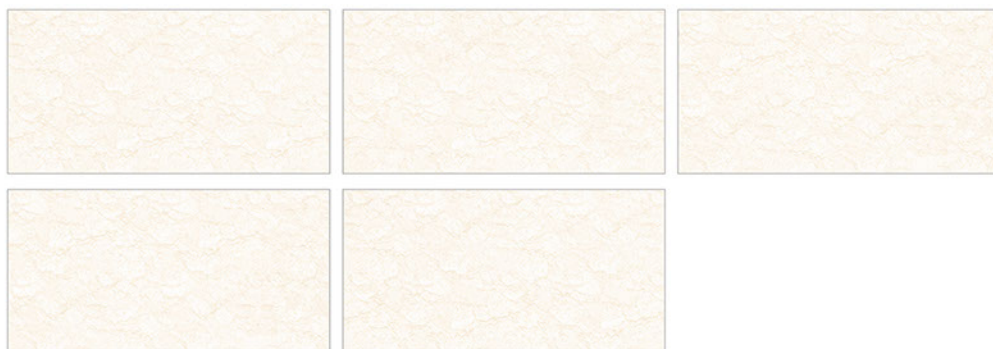

# ORCHID BROWN



LIQUID REPELLENT



STAIN RESISTANT



SCRATCH RESISTANT



FIRE RESISTANT



RESISTANT TO UV RAYS



IMPACT RESISTANT



FROST RESISTANT







# PARADISE BIANCO

Size : 600x1200mm



Finish : Glossy

Random : 03

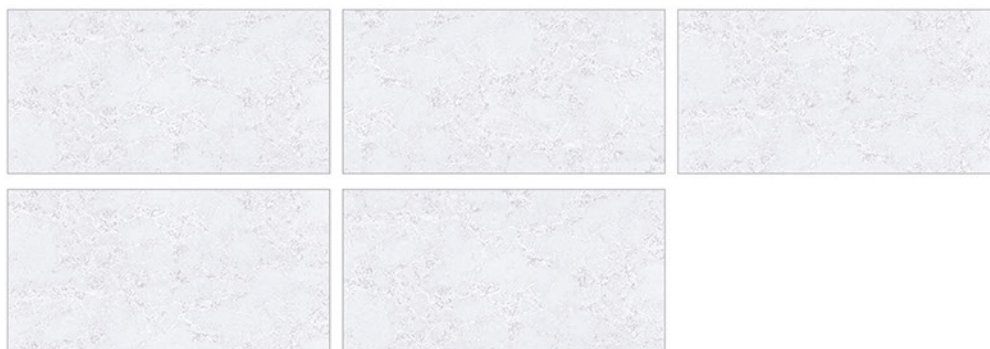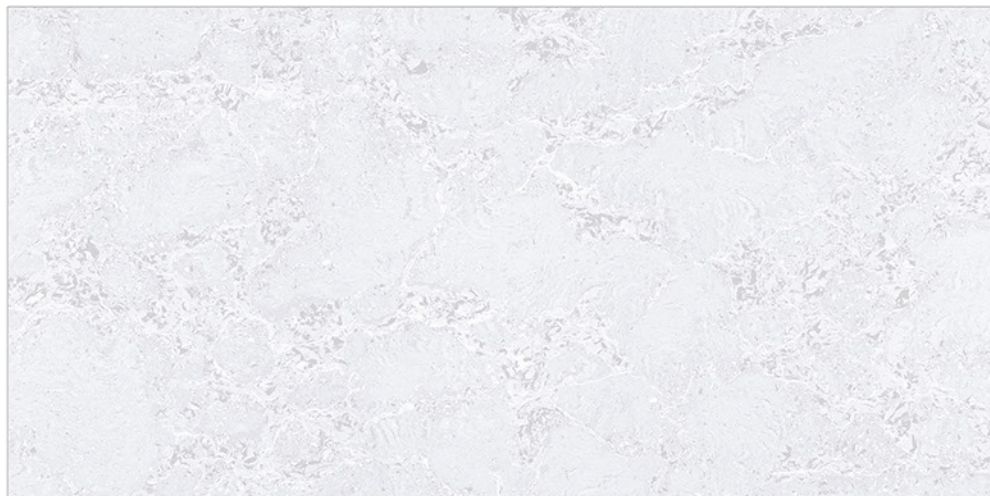

-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT

# PARADISE GRAFITO

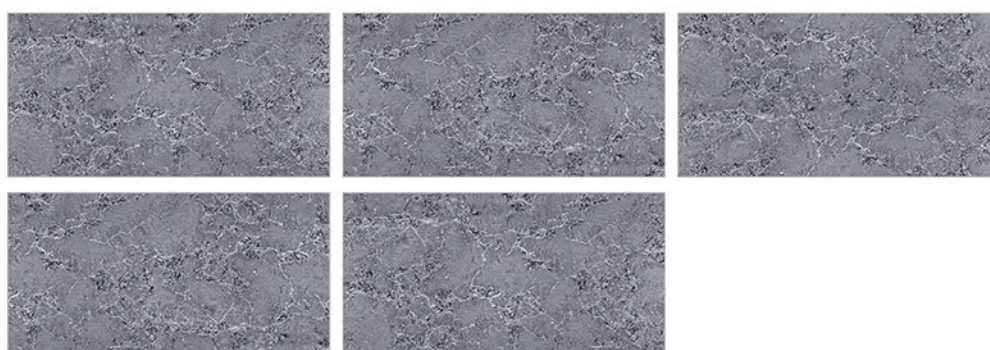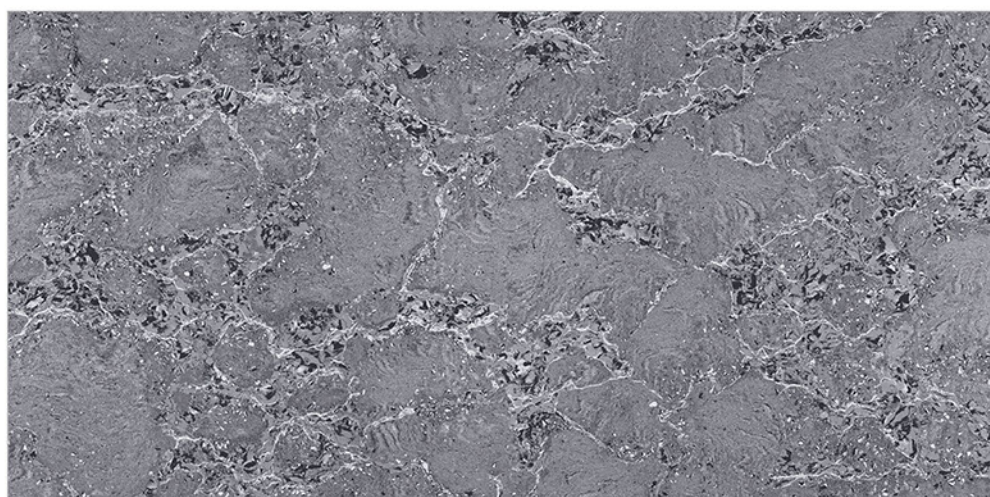

-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT





# PARADISE BROWN

Size : 600x1200mm

Finish : Glossy

Random : 03

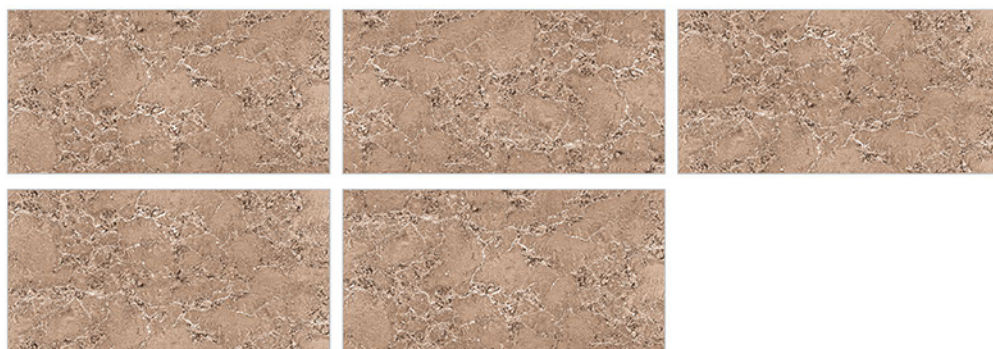
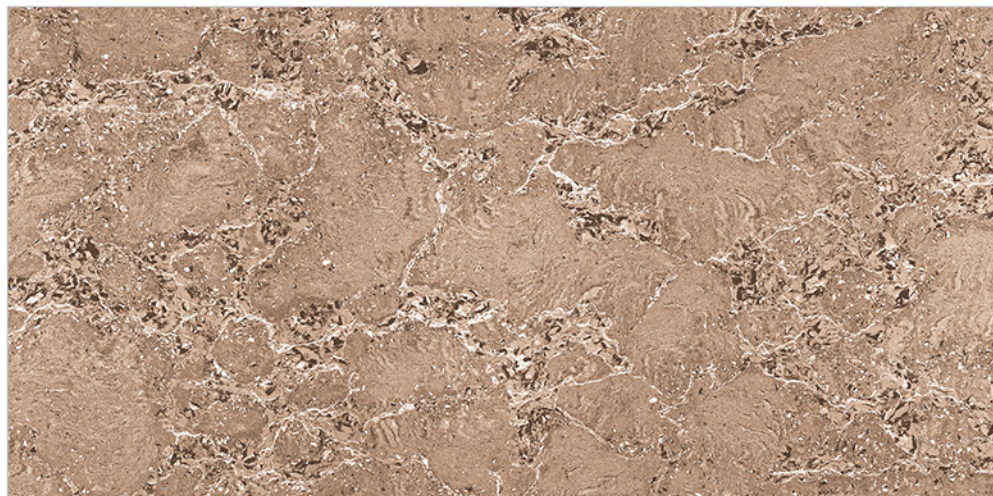


# PARADISE CREMA

Size : 600x1200mm

Finish : Glossy

Random : 03

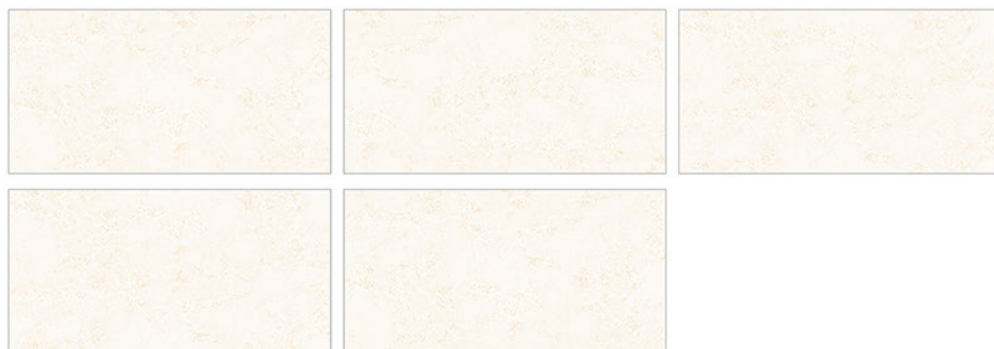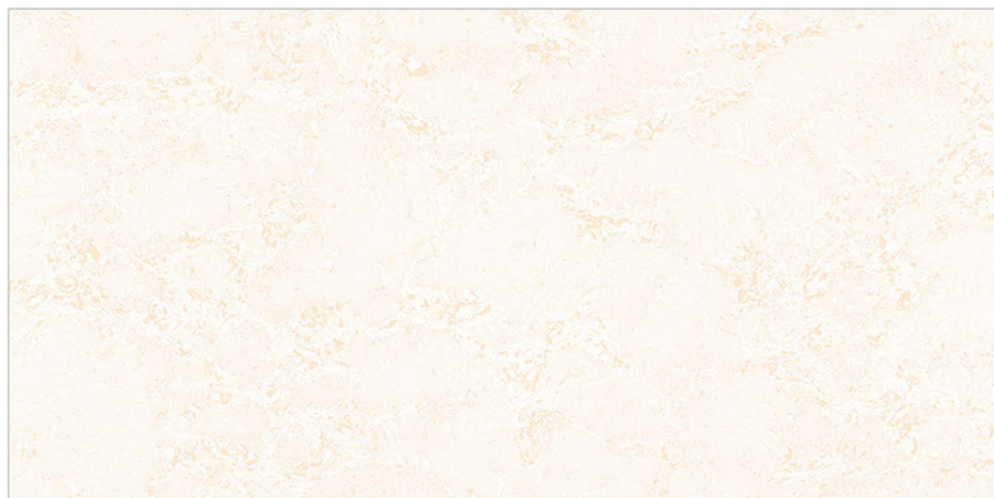


# PARADISE KOTA

Size : 600x1200mm  
Finish : Glossy  
Random : 03





- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT

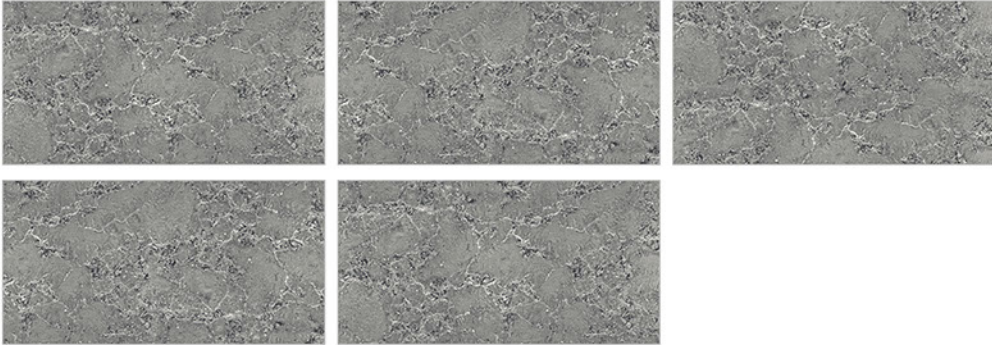



# QUARTZ BLUE

Size : 600x1200mm  
Finish : Glossy  
Random : 03

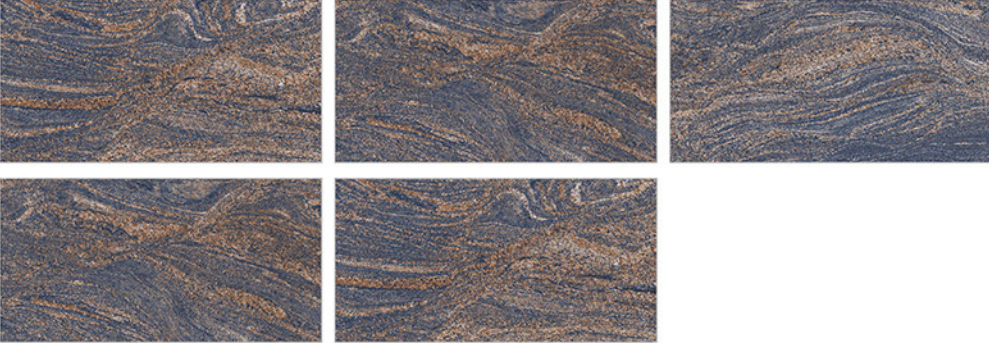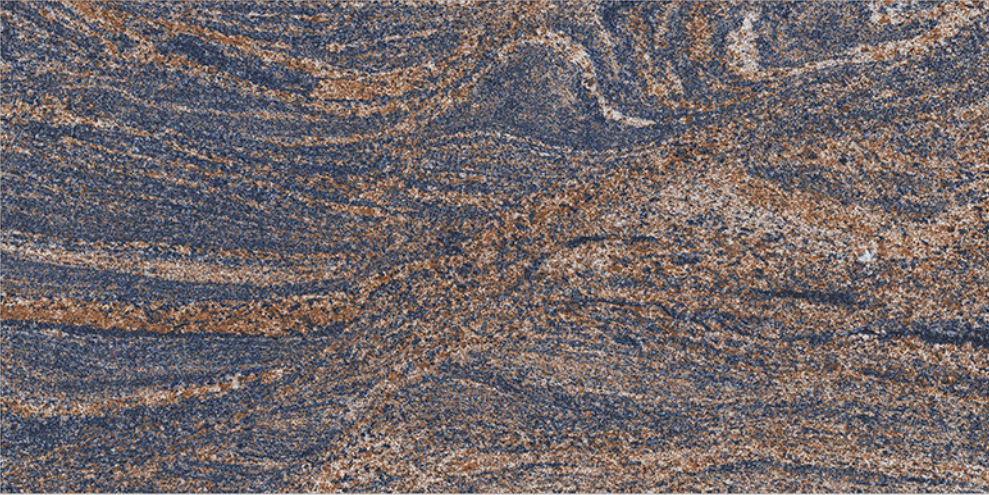

- LIQUID REPELLENT
- STAIN RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- RESISTANT TO UV RAYS
- IMPACT RESISTANT
- FROST RESISTANT




# QUARTZ GREY

Size : 600x1200mm

Finish : Glossy

Random : 03


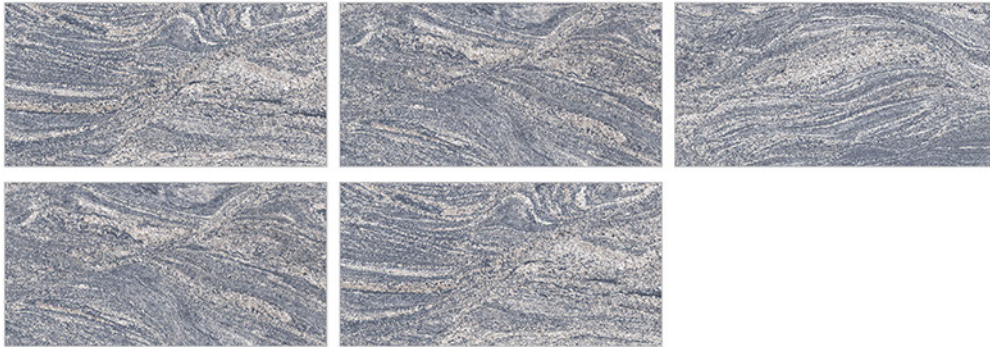


# STARDUST AQUA

Size : 600x1200mm

Finish : Glossy

Random : 03

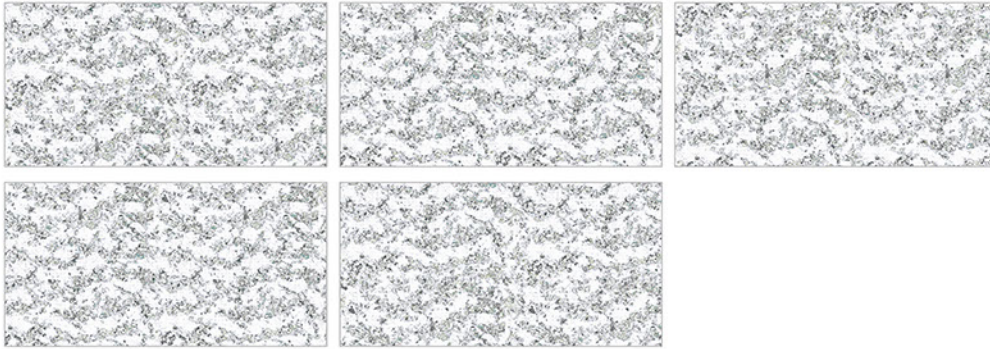
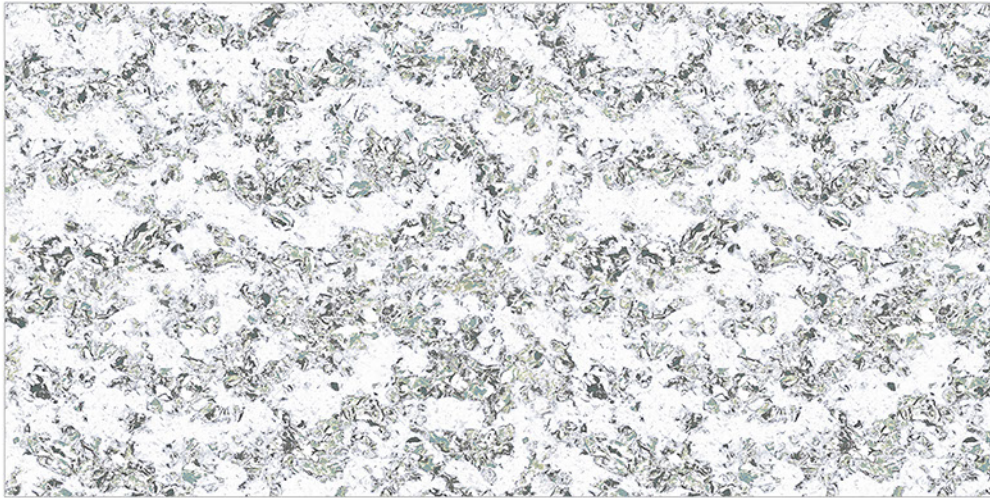


# STARDUST RED

Size : 600x1200mm

Finish : Glossy

Random : 03

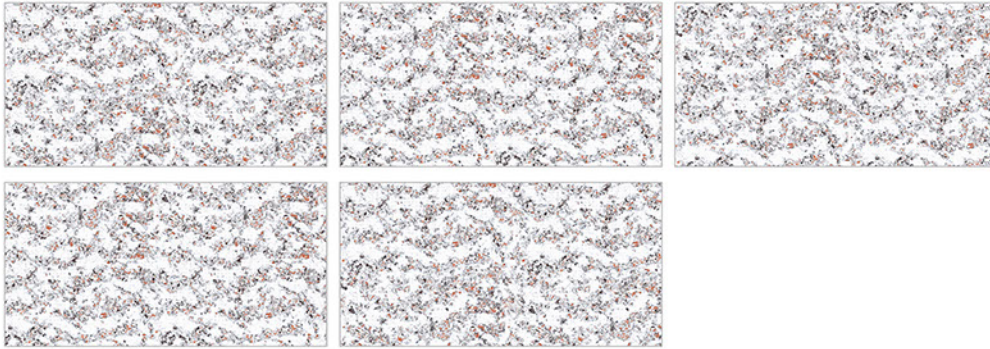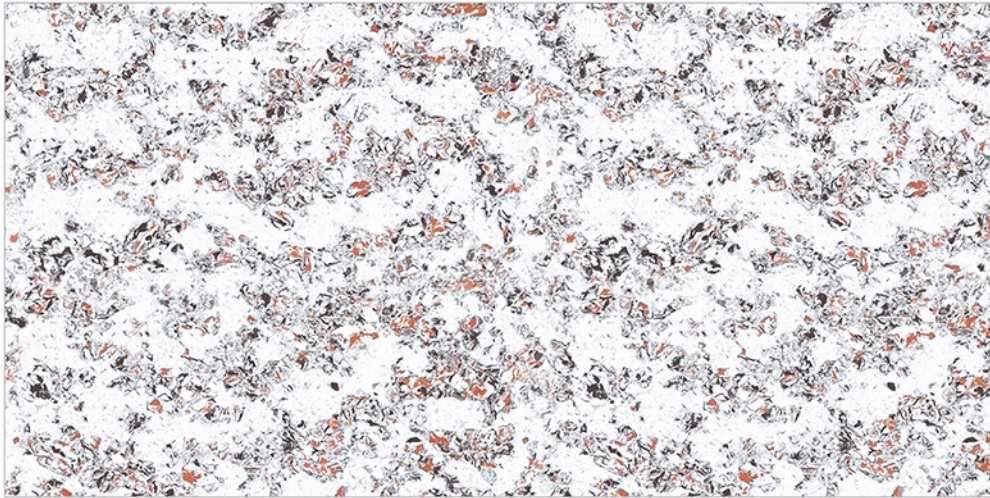


# TROPIC ALMOND

Size : 600x1200mm

Finish : Glossy

Random : 03

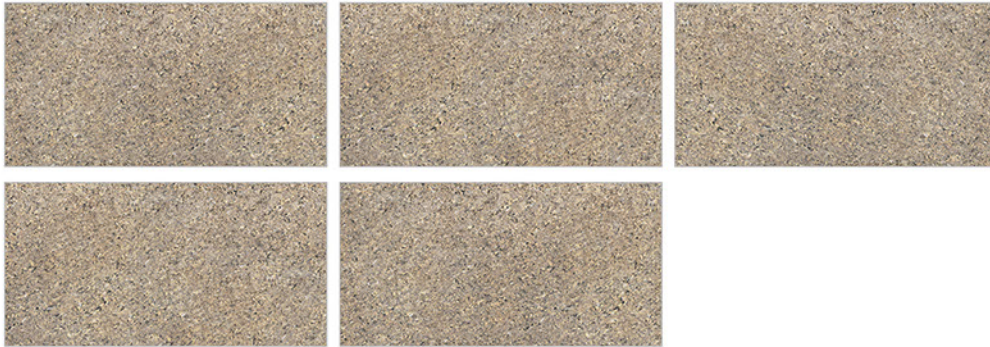


# TROPICANA BIANCO



Size : 600x1200mm

Finish : Glossy

Random : 03

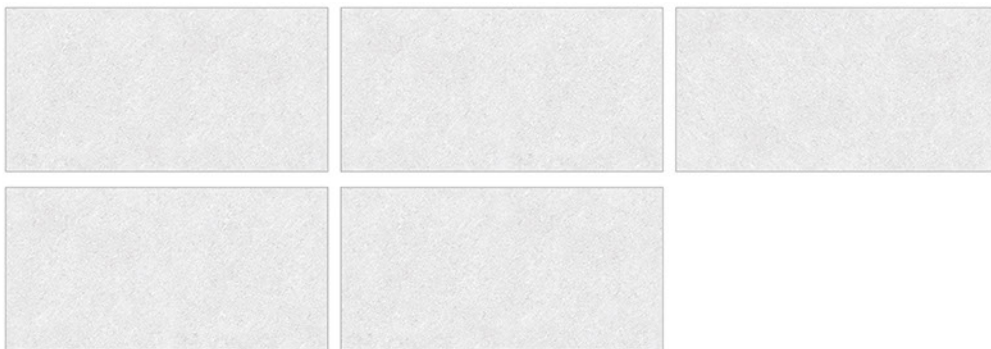

# TROPICANA NERO

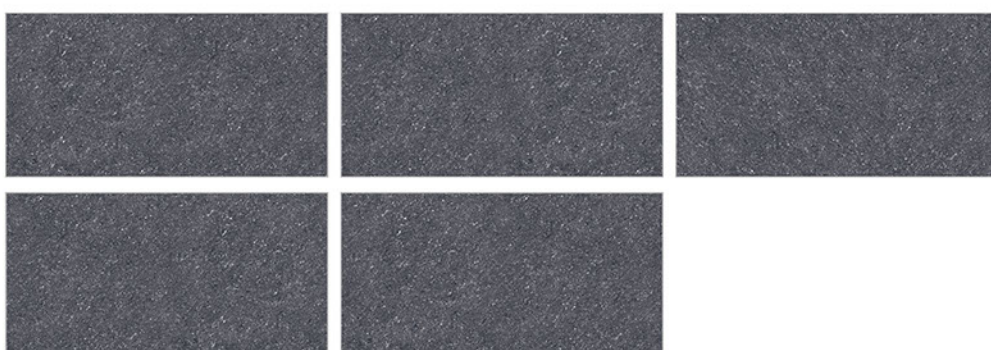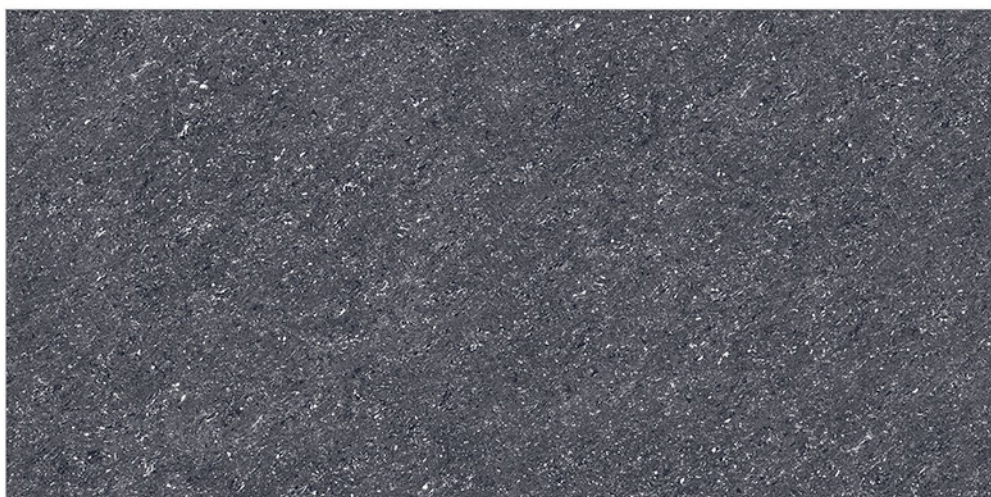




# TROPICANA CREMA

Size : 600x1200mm

Finish : Glossy

Random : 03

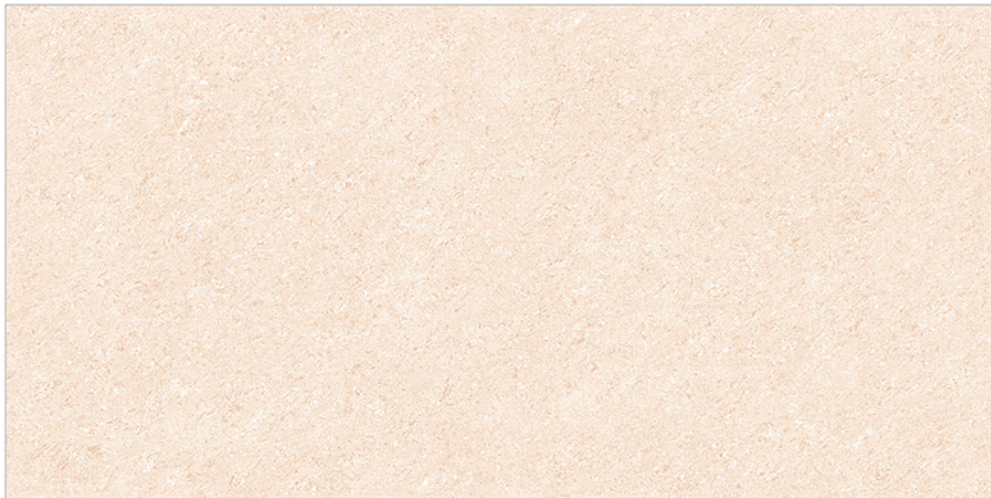

# TROPICANA BROWN








UNISS

# TROPICANA ICE



Size : 600x1200mm

Finish : Glossy

Random : 03

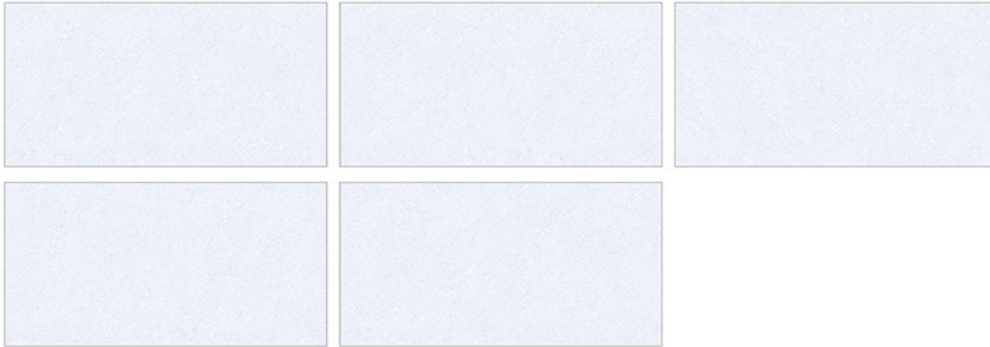

# TROPICANA BLUE

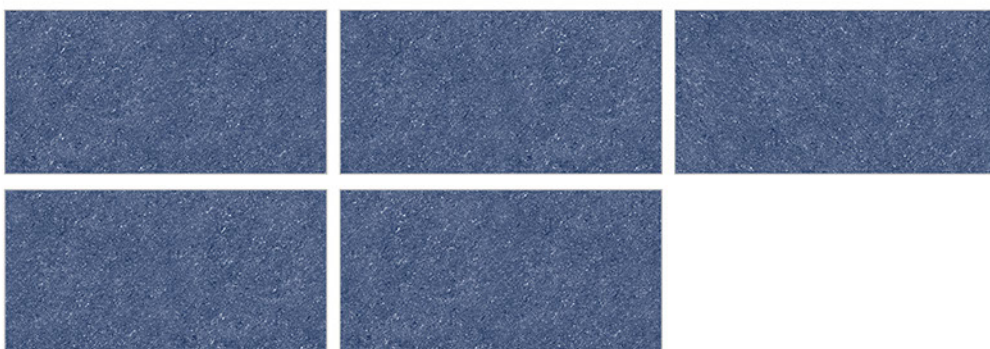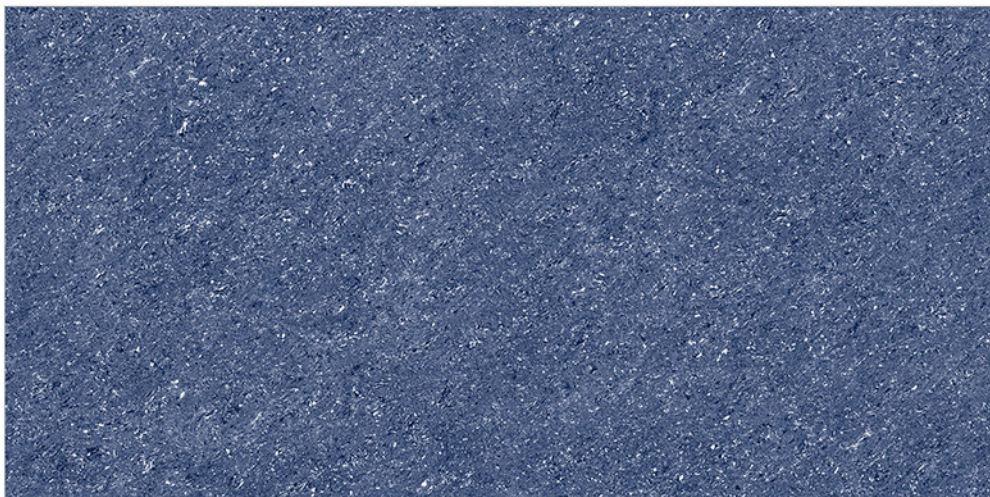



# GLAZED VITRIFIED TILES

## 600x1200 mm

TECHNICAL SPECIFICATION FOR 600x1200MM GVT TILES				
Characteristics	Requirement as per IS 15622 : 2017 < E ≤ 0.08 Group Bla	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
<b>A) Dimension &amp; Surface Quality</b>				
i) Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	± 0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center curvature (%) ( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
b) Edge curvature (%) { max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
c) Corner warpage %)( max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
<b>B) Physical Properties</b>				
i) Water Absorption	Av E ≤ 0.08 %, Individual 0.1 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E ≤ 0.08 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm <sup>2</sup> ]	Av 35, Individual 32 min	Av 35, Individual 32 min	Avg, 35 Ind 32	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	Min. 1300	Min. 1300	Min. 1300	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5 (for VC & RT), Min.3 (for Polished)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class-V (for VC & RT), Class-III (for Polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 100° C	6 X 10 <sup>-6</sup> K <sup>-1</sup> Max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Craze Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Re stitution	0.55 min	Required	Min 0.55	ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
<b>C) Chemical Resistance (glazed Tiles)</b>				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min Class GB	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value'	Min Class AA	

PACKING DETAIL FOR 600x1200MM GVT TILES				
Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	9.0 (Approx)	28.00 (Approx)	2	1.44sq.mtr./15.50sq.ft.

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Arkstone wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.



[www.eddicceramics.com](http://www.eddicceramics.com)



## EDDICA CERAMICS LLP

Survey No. 329-1, Opp. Somnath Petrol Pump,  
Rangpar (Bela), Morbi - 363642, Gujarat, INDIA.

+91 95122 30015    info@eddicceramics.com    www.eddicceramics.com